

ECO SLIM WALL PACK



Finish Color



The ECO-Slim Wall Pack combines proven LED lighting performance in a basic low-profile wall pack for lower mounting heights up to fifteen feet. Rugged construction holds up to extreme conditions encountered at low mounting heights.

Applications: security lighting, elevator lobbies, entries way, small area illumination, etc.



Replacement: 100W MH

ELECTRICAL LOAD

Series Number	Wattage	Current (A)			
		120V	208V	240V	277V
WSE 30 G1 5K	30W	0.25	0.14	0.13	0.11

PHOTOMETRIC

WSE 30 (20 Feet Mounting)

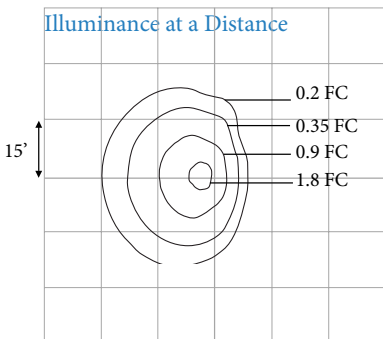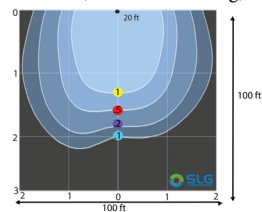


Multiplier	1.8	1.2	1.0	0.8	0.6
Mounting Height	15	18	20	22	25

ISOFOOT CANDLE for WSE30.
15FT mounting height.

Grid scales: Multiples of mounting height Values shown in footcandle.

DIMENSIONS

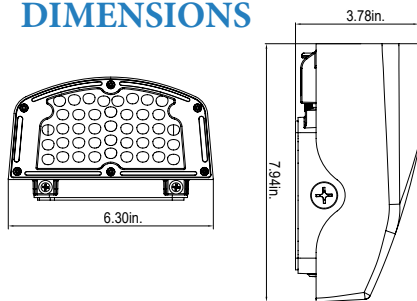

Project:	
Catalog No.:	
Fixture Type:	
Notes:	

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and mounting box. Parting lines dressed for high quality finish.

AMBIENT TEMPERATURE

Suitable for use in -40°C to +55°C (-40°F to 131°F)

MOUNTING

Heavy-duty mounting bracket with hinged housing for easy installation

DATA ENERGY

100-240V = 0.3-0.15 Amps; 277V = 0.15Amps. 99% power factor. 30W input.

CCT AND CRI

5000K CCT available; 70CRI

OPTICS

Polycarbonate reflector, vacuum metalized to specular finish. Multi-chip long-life Lumiled LEDs. Polycarbonate lens and stainless steel retaining screws.

GASKETS

High Temperature silicone gaskets seal the luminaire to IP66 standard.

WARRANTY

10 year limited warranty. Complete warranty terms located at:

www.slgus.com

ACCESSORIES

ELECTRICAL

Voltage: 120/277V standard. High quality constant-current Driver with the efficiency of (>90% standard); 50/60Hz; Open/short circuit protection; 10K Surge protector per ANSI/IEEE C62.41.2;

FINISH

Polyester Powder Finish protects the luminaire from corrosion for a long lasting appearance

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant. IDA dark-sky compliance.

ORDERING GUIDE

Luminaire Type	Lumen Output*	Generation	Voltage	CCT	Finish	Options
WSE ECO LED Slim Wall Pack Small	30 3,000 Lumens	G1	Standard 120-277V	5K 5000K	Standard Dark Bronze	Standard No Option

NOTE: Standard driver operates on any line voltage from 120-277V (50/60 Hz).

Data as report to DLC, actual test results may vary

EXAMPLE: WSE 30 G1 5k

Scan for more information



SLG Lighting
10643 W. Airport Blvd. Suite 400, Stafford, Texas 77477
Email: support@slgus.com | Phone: (832) 939-8412 | www.slgus.com

WSE.V18.06